


ACCOSOUND

ACOUSTIC INSULATION

Airborne Noise Reduction

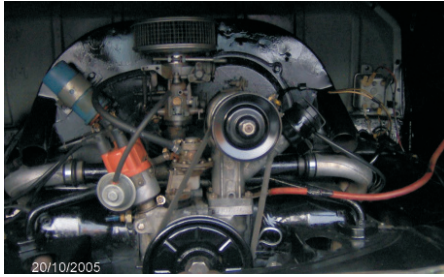

Applications

Industry

Generator Canopies, Engines, Air Handling Units, Wall Acoustics, Printing and Metal Handling Machinery, Pipelines, Vacuum Cleaner, Washing Machine and General Enclosures.

Transport

Engine rooms in vehicles and vessels, operator's cabin of earth moving machinery, Mobile generator vans.

Health Care


Audiometric rooms.

Commercial Buildings

Lifts, Motor Rooms, Office Partitions, Floating Floors, Recording Rooms, Bowling Alley, Dance Floors, Studios, Auditoriums, Multiplexes and Cinema Halls.

Method of Use

The sheets are cut to the required shape and carefully stuck using a suitable rubber based adhesive on to a surface that must be free from oil, dirt and dust.

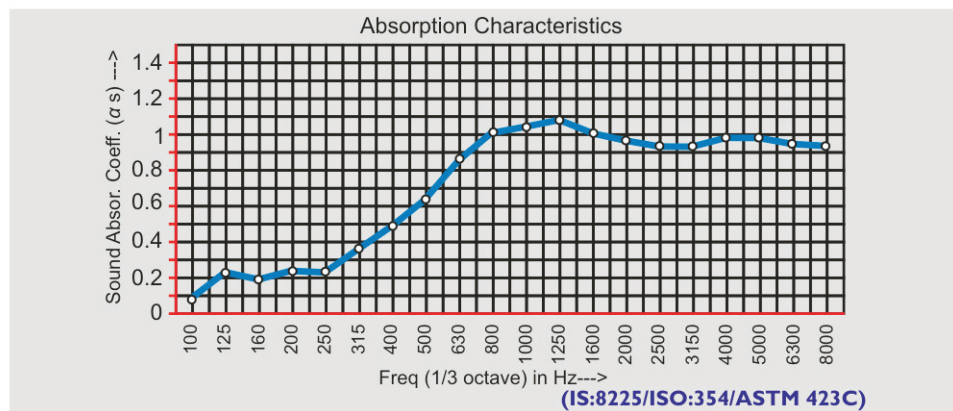

Product Characteristics Accosound is a blended elastomeric nitrile rubber acoustic absorber having open cell structure with complex pore geometry for effective absorption of air-borne sound across a broad range of frequencies.

The high density provides an effective barrier to sound transmission.

The elastic properties helps to dampen the structure-borne noise transmission.

Antimicrobial range Accosound-AM is also available*

(EPA approved anti-microbial agent)

Advantages

Effective noise control and thermal insulation

Dust and Fiber Free

Resistant to Mineral Oil, Organic Solvents and Dilute Inorganic Acids & Bases

Note:

The shaping, thickness and positioning of the material is of major importance to achieve an optimal noise-absorption effect.

It can be used for noise control in a Wide range of industrial fields.

Please refer details given in the datasheets.

Please contact us for feasibility of manufacturing of customized material sizes.

Technical data

Noise Absorption	See Diagram
Max. Surface Temp.	+105° C
Min. Surface Temp.	- 40° C
Fire safety	Class 1 (BS476 Part 7), ASTM D635, IS 15061
Colour	Black
Density	150, 200, 250 Kg/m ³ (±10%)
Thermal conductivity	0.04 W/mK
Antifungal*	ASTM G21
Antibacteria*	ASTM 2180

CERTIFICATIONS



SGS



ARAI
Progress through Research

NOISE CONTROL

Packing Details

Thick	No of Pcs/Box	Total SQM/Box
10mm	10 Pcs	10 Sqm
12mm	8 Pcs	8 Sqm
15mm	7 Pcs	7 Sqm
20mm	5 Pcs	5 Sqm
25mm	4 Pcs	4 Sqm
30mm	3 Pcs	3 Sqm

Corporate Office :

Plot No. 32, Sector-18 HUDA,
Gurgaon - 122 015 Haryana. INDIA
Tel.: +91-124-4731500
Fax: +91-124-4731598, 4731599
E-mail: marketing@alpaeroflex.com,
Web: www.alpaeroflex.com


AEROFLEX[®]
ALP AEROFLEX INDIA PVT. LTD.

Plant :

Bilaspur Road, Opp.Govt.P.G.College,
Rudrapur Distt-U.S.Nagar
(Uttarakhand) INDIA
Tel: +91-5944-247869, 247870
Fax: +91-5944243813